



Server Cabinets with perforated front door



The DIGITUS® server cabinets are especially suitable for server and switches with high installation depth. The reasoned construction ensures an effectively air circulation and cooling for installed devices. The cabinet can be taken apart for easy entry in small rooms.

- 1.5mm - 2mm strong sheet steel with a high loading capacity, powder coated
- Side sections detachable and lockable
- Ventilation slots for active and passive ventilation and exhaustion
- Protection rating IP 20
- 60 % perforated steel front door, with lockables wing handle
- 60 % perforated double-wing steel rear doors, with lockables wing handle
- Spring-mounted hinges enable easy installation of the door or door change
- 3-point locking system, optionally available with cylinder lock
- Suitable for all server types with 483mm (19") mounting
- Up to 1000kg carrying capacity
- Up and down numbered 483mm (19") profiles on the front and back side, adjustable in depth
- Large cable entry with rubber-edged sliding mechanism on the floor
- Height-adjustable levelling feet for the equalisation of uneven floors
- Caters for better mobility
- Tilt-prevention mechanism when pulling out servers
- Roof module for ventilation unit
- Including set of 28 x 483mm (19") assembly screws
- Complying with international standards IEC 297-1/2 and IEC 917-2-1
- Extensive range of accessories available



Ventilation slots on the roof

**Incl. fixed
Castors.**



3 point locking system



Up & down numbered 483mm (19") profiles



Side view



Lockable handle




Tilt prevention mechanism




2 door opening back doors




Ready to install filter mat

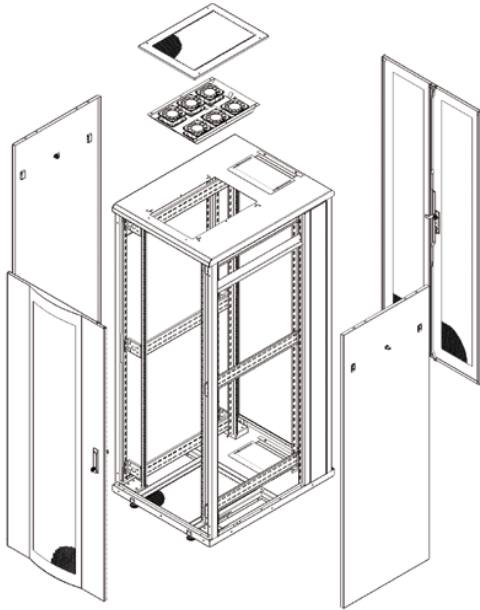

Server Cabinets 600 x 1000mm

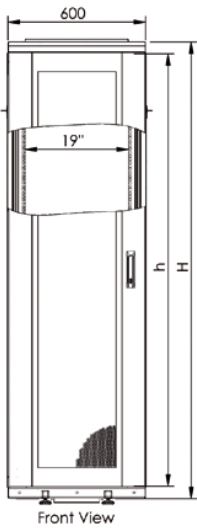


Front View

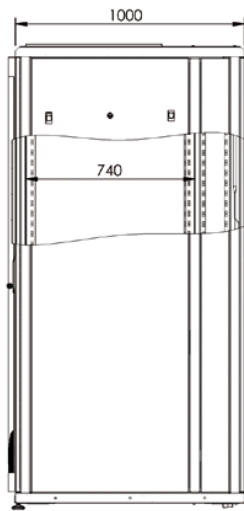

Side View




Back View

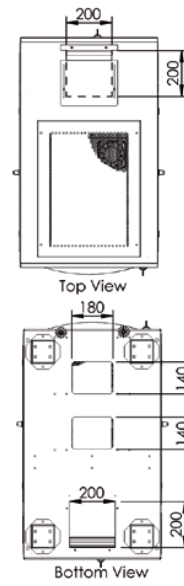


Bottom View

Server Cabinets 780 x 1000mm

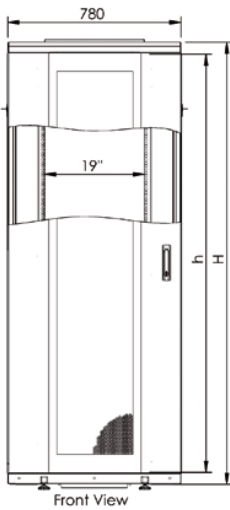


Front View

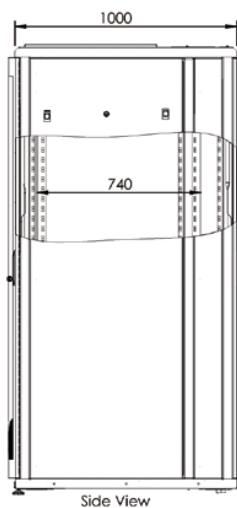

Side View



Back View

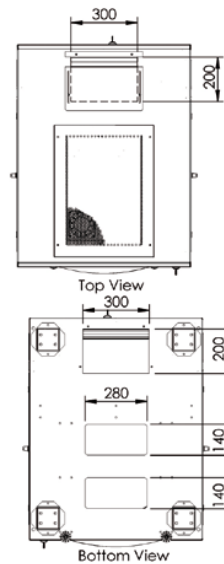

Bottom View



Server Cabinets 600 x 1000mm

Art. Nr	EAN Code	feature	U	color	RAL	height (mm)	width (mm)	depth	weight (kg)	loading capacity (kg)	free space between front door & mounting angle dimension (mm)	free space between rear door & mounting angle dimension (mm)	dimension between front and rear mounting angle Dimension (mm)
DN-19 SRV-26U-N	182979	60 % perforated front & 2 door opening backdoors	26	grey	7035	1338	600	1000	98,2	1000	55	160	740
DN-19 SRV-26U-SW-N	184171	60 % perforated front & 2 door opening backdoors	26	black	9005	1338	600	1000	98,2	1000	55	160	740
DN-19 SRV-26U-GD	157915	plexi glas front door, 60 % perforated 2door opening back doors	26	grey	7035	1338	600	1000	98,2	1000	55	160	740
DN-19 SRV-26U-SW-GD	169604	plexi glas front door, 60 % perforated 2door opening back doors	26	black	9005	1338	600	1000	98,2	1000	55	160	740
DN-19 SRV-36U-N	217732	60 % Perforierte Front & 2door opening back doors	36	grey	7035	1782	600	1000	119,4	1000	55	160	740
DN-19 SRV-36U-SW-GD	228721	plexi glas front door, 60 % perforated 2door opening back doors	36	black	9005	1782	600	1000	119,4	1000	55	160	740
DN-19 SRV-42U-N	182962	60 % perforated front & 2 door opening backdoors	42	grey	7035	2049	600	1000	134,4	1000	55	160	740
DN-19 SRV-42U-SW-N	183488	60 % perforated front & 2 door opening backdoors	42	black	9005	2049	600	1000	134,4	1000	55	160	740
DN-19 SRV-42U-GD	145608	plexi glas front door, 60 % perforated 2door opening back doors	42	grey	7035	2049	600	1000	134,4	1000	55	160	740
DN-19 SRV-42U-SW-GD	174318	plexi glas front door, 60 % perforated 2door opening back doors	42	black	9005	2049	600	1000	134,4	1000	55	160	740
DN-19 SRV-47U-N	205833	60 % perforated front & 2 door opening backdoors	47	grey	7035	2272	600	1000	147,4	1000	55	160	740
DN-19 SRV-47U-SW-N	205869	60 % perforated front & 2 door opening backdoors	47	black	9005	2272	600	1000	147,4	1000	55	160	740
DN-19 SRV-47U-GD	211006	plexi glas front door, 60 % perforated 2door opening back doors	47	grey	7035	2272	600	1000	147,4	1000	55	160	740

Server Cabinets 780 x 1000mm

DN-19 SRV-42U-8-N	182986	60 % perforated front & 2 door opening backdoors	42	grey	7035	2049	780	1000	170	1000	40	173	740
DN-19 SRV-42U-8-SW-N	186151	60 % perforated front & 2 door opening backdoors	42	black	9005	2049	780	1000	170	1000	40	173	740
DN-19 SRV-42U-8-GD	170150	plexi glas front door, 60 % perforated 2door opening back doors	42	grey	7035	2049	780	1000	170	1000	40	173	740
DN-19 SRV-42U-8-SW-GD	174318	plexi glas front door, 60 % perforated 2door opening back doors	42	black	9005	2049	780	1000	170	1000	40	173	740
DN-19 SRV-47U-8-N	205845	60 % perforated front & 2 door opening backdoors	47	grey	7035	2272	780	1000	176,4	1000	40	173	740
DN-19 SRV-47U-8-SW-N	205852	60 % perforated front & 2 door opening backdoors	47	black	9005	2272	780	1000	176,4	1000	40	173	740
DN-19 SRV-47U-8-GD	211105	plexi glas front door, 60 % perforated 2door opening back doors	47	grey	7035	2272	780	1000	176,4	1000	40	173	740
DN-19 SRV-47U-8-SW-G	211082	plexi glas front door, 60 % perforated 2door opening back doors	47	black	9005	2272	780	1000	176,4	1000	40	173	740